


CASE(n)	W	W/2	W/8	D	W/8•D	VOLUME•m³/m
1	1000	500	125	125	250	0.1250
2	1500	750	188	125	313	0.1875
3	2000	1000	250	150	400	0.3000
4	2500	1250	313	150	463	0.3750

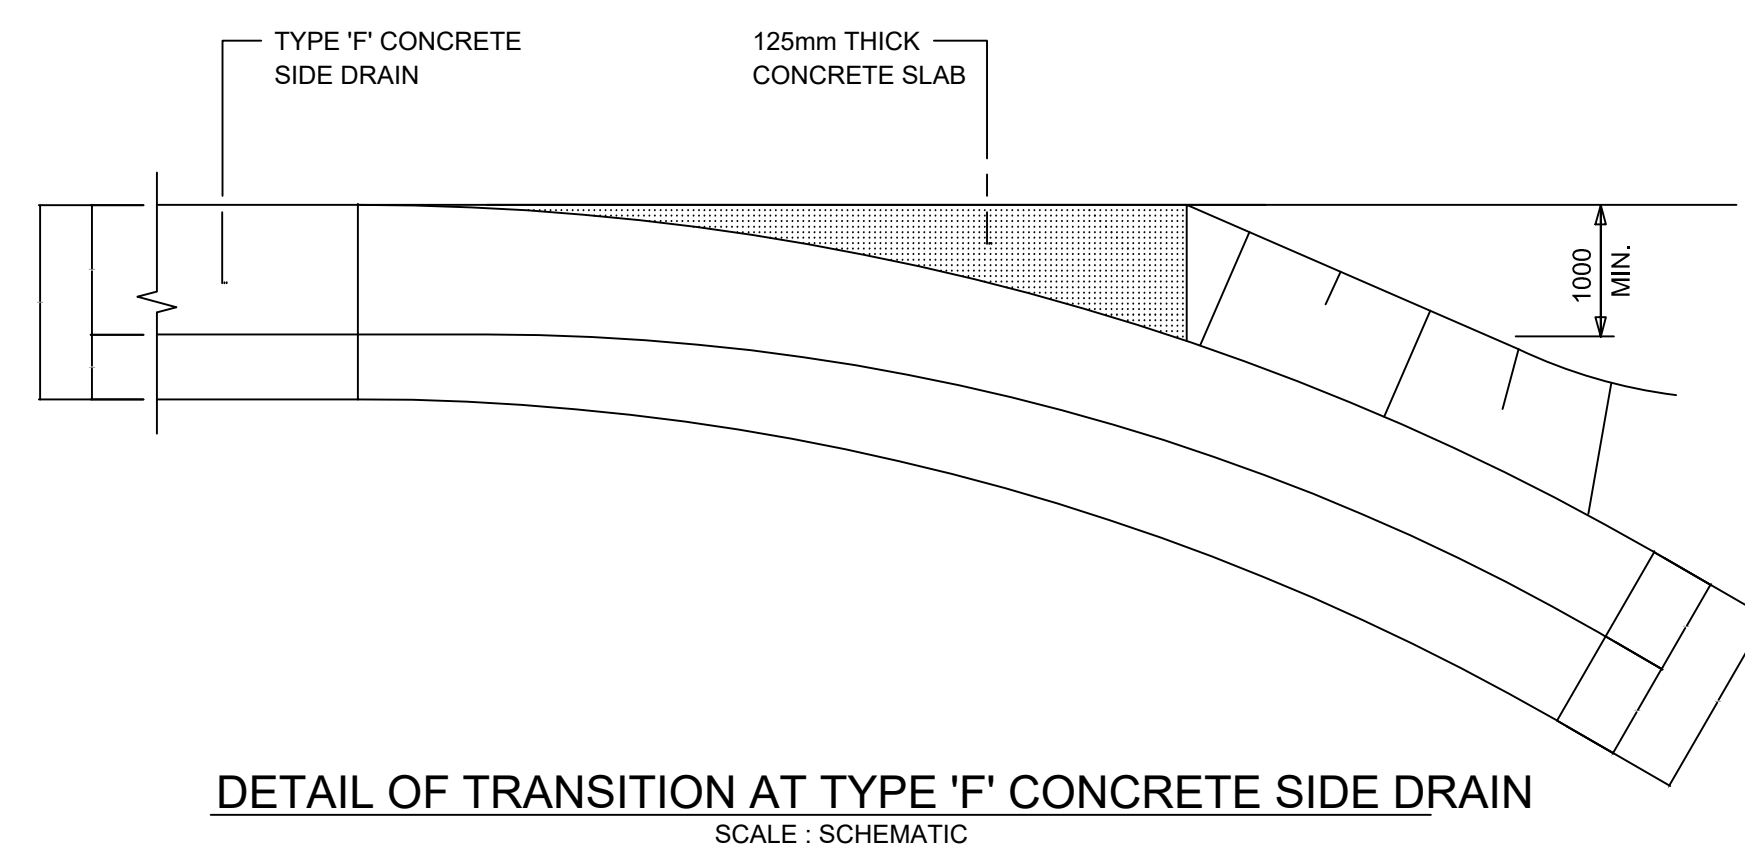

CASE(n)	W	X	Y	1:8	1:6	D	VOLUME ³ m
1	1000	670	330	85	110	125	0.1250
2	1500	1000	500	125	170	125	0.1875
3	2000	1330	670	165	220	150	0.3000
4	2500	1670	830	210	280	150	0.3750

- ## NOTES
1. ALL EXPOSED CHANNELS AND OTHER DRAINAGE STRUCTURES ON THIS PLAN TO BE CAST USING CLASS 30/19 CONCRETE
 2. TYPES 'E' AND 'F' CONCRETE MUST BE CAST IN ALTERNATIVE LENGTHS OF 2.0 m MAXIMUM WITH EXPANSION JOINTS EVERY 5th PANEL (10 m)
 3. ALL EXPOSED CORNERS MUST BE ROUNDED OFF TO A RADIUS OF 10 mm
 4. THE CLASS OF SURFACE FINISH IS INDICATED AS 'F1' OF 'U2'
 5. V MIN. = 150mm (PREFERRED = 300mm)